


FSC RANGE - GALVANISED STEEL

FLEXIBLE CONDUIT .

Product ID: **FSC FLEXIBLE CONDUIT RANGE** (Galvanised Steel flexible Conduit (EU Size))

TECHNICAL FEATURES:

- Helically wound flexible galvanized steel core.
- Inherently flame retardant (LFH).
- High mechanical strength.
- IP40 – no protection against moisture (dry environment)
- Excellent flexibility.
- Use in public and commercial buildings, tunnels and underfloor wiring applications.
- Temperature rating: -50C ~ +300C.
- Standard colour: Zinc – self colour
- Brass nickel plated fittings.
- Compression Strength – 1250 Newtons.

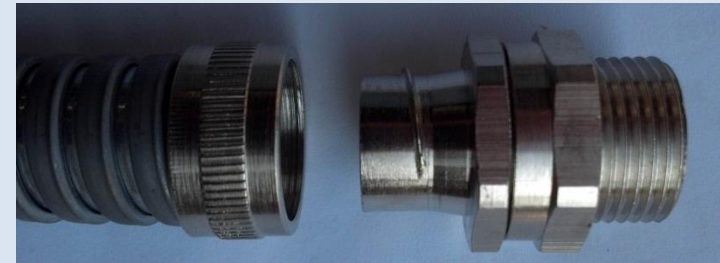

TECHNICAL DIMENSIONS

CATALOGUE NUMBER	NOMINAL SIZE	INTERNAL DIAMETER MIN. (mm)	OUTSIDE DIAMETER MIN. (mm)	MINIMUM BENDING RADIUS (mm)	REEL LENGTHS (MTRES)
FSC16-50	M16	13.00	16.00	40.00	50/25/10
FSC20-50	M20	16.90	20.50	45.00	50/25/10
FSC25-50	M25	21.10	25.00	55.00	50/25/10
FSC32-50	M32	28.10	32.00	60.00	50/25/10
FSC40-30	M40	37.60	42.50	80.00	30/10
FSC50-20	M50	48.40	53.00	90.00	20/10