L&C Industrial Supplies PTY LTD

LTSS - STAINLESS STEEL FLEXIBLE CONDUIT

Harsh Environment Protection

Product Details:

Metal Used: Marine grade 316 stainless steel
Standard Colours: Black
Working Temperatures -30°C to 80°C Dry / 60°C Wet / 70°C Oil
Fittings: LC stainless Steel fittings IP 66/67/68
Characteristics High tensile strength
Liquidtight Jacket

- Flexible PVC
- Resistant to Oils and Mild Acids
- Flame Retardant
- Sunlight Resistant (UV)
- Conforms to UL360

Applications

- Machine tools
- Corrosive environments
- Industrial environments
- Wet and oily locations
- Compatible with standard Liquidtight connectors
- Outdoor use due to the inherent UV resistance of PVC
- Provides a liquidtight flexible protective wiring raceway
- RoHS and WEEE compliant

Product Catalogue No	Trade Size	Type	Internal Diameter (mm)		Outer Diameter (mm)		Inside Bend Radius	Kgs per 30 Metres	Coil Length	Reel Length
			Min.	Max.	Min.	Max.				
LTSS-16-B	3/8"	LTSS-10	12.29	12.80	17.53	18.03	51	10	30	150 / 300
LTSS020-B	1/2"	LTSS-11	15.80	16.31	20.83	21.34	76	13	30	150 / 300
LTSS025-B	3/4"	LTSS-12	20.83	21.34	26.16	26.67	107	17	30	150 / 300
LTSS032-B	1"	LTSS-13	26.44	27.08	32.77	33.40	140	28	30	120
LTSS040-B	1-1/4"	LTSS-14	35.05	35.81	41.40	42.16	178	36	15	60
LTSS050-B	1-1/2"	LTSS-15	40.01	40.64	47.37	48.26	114	47	15	45
LTSS063-B	2"	LTSS-16	51.31	51.94	59.44	60.33	152	54	15	30
LTSS080-B	3"	LTSS-18	77.98	78.74	87.88	88.90	254	134	8	53
LTSS100-B	4"	LTSS-19	101.60	102.62	113.28	114.30	305	186	8	100

Call	5"	LTSS-500	126.37	127.89	139.83	141.35	445	249	8	
Call	6"	LTSS-600	152.78	154.31	166.75	168.28	572	305	8	

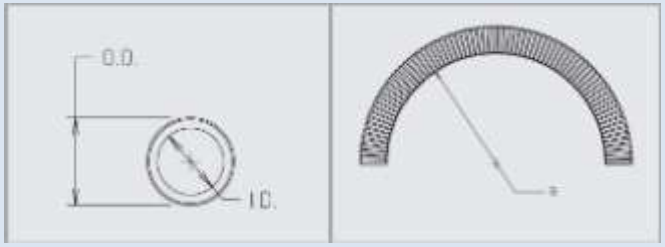

MADE in the USA