


Copper Cable Lugs – Heavy Duty, Long Barrel, Plain Entry

- Non-flared plain cable entry
- Compression Type cable lugs

Product Details:

Material	-	E-Copper
Finish	-	Electro-tinned copper
Characteristics	-	Non-flared plain cable entry with inspection hole
Voltage Rating	-	Up to 11kV

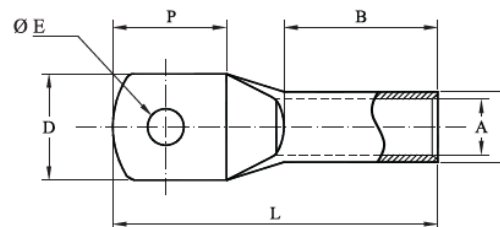

L&C Product Code	Cable Size (mm ²)	Hole Size (Ø E)	Dimensions (mm)					
			A	C	D	P	B	L
CL1.5-4	1.5	4.2	1.8	3.7	8	9	5	16
CL1.5-5		5.2				10		
CL1.5-6		6.2				12		
CL2.5-4	2.5	4.2	2.4	4	8	9	7	18
CL2.5-5		5.2				12		20
CL2.5-6		6.2				15		24
CL4-5	4	5.2	3.1	4.8	10	11	7	26
CL4-6		6.2				12		25
CL4-8		8.2				15		25
CL4-10	6	10.5	3.8	5.5	10	11	11	26
CL6-5		6.2				12		30
CL6-8		8.2				14		39
CL6-10	10	10.5	4.5	6.9	12	14	11	28
CL10-6		8.2				16		30
CL10-8		10.5				21		35
CL10-10	16	13.0	5.9	8	12	15	20	13
CL16-6		8.2				18		50
CL16-8		10.5				26		50
CL16-10	25	13.0	7.0	9.7	14	16	23	42
CL16-12		8.2				23		50
CL25-6		10.5				27		53
CL25-8	35	13.0	8.4	11.5	16	19	23	46
CL25-10		8.2				27		53
CL25-12		10.5				35		63
CL35-6	50	13.0	9.5	12.7	18	20	24	49
CL35-8		6.2				24		63
CL35-10		8.2				20		49
CL35-12	50	10.5				24		63
CL50-6		13.0				24		63
CL50-8		6.2				24		63
CL50-10		8.2				24		63
CL50-12		10.5				24		63

L&C Product Code	Cable Size (mm ²)	Hole Size (Ø E)	Dimensions (mm)					
			A	C	D	P	B	L
CL70-6	70	6.2	11.1	14.3	20	23	24	54
CL70-8		8.2						
CL70-10		10.5						
CL70-12	95	13.0	13.6	17.4	25	29	25	60
CL95-8		8.2						
CL95-10		10.5						
CL95-12	120	13.0	15.5	20.6	29	27	32	70
CL95-16		17.0						
CL120-8		8.2						
CL120-10	150	10.5	16.3	22.3	31	34	32	76
CL120-12		13.0						
CL120-16		17.0						
CL150-8	185	8.2	18.3	24.3	34	35	32	81
CL150-10		10.5						
CL150-12		13.0						
CL150-16	240	17.0	21.2	28.6	40	41	40	99
CL185-10		10.5						
CL185-12		13.0						
CL185-16	300	17.0	23.8	31.9	45	45	47	107
CL240-10		10.5						
CL240-12		13.0						
CL240-16	400	17.0	27.5	35.5	49	51	48	113
CL300-10		10.5						
CL300-12		13.0						
CL300-16	500	17.0	30.0	38	55	60	50	130
CL400-10		10.5						
CL400-12		13.0						
CL400-16	630	17.0	34.5	44	64	68	57	146
CL500-10		10.5						
CL500-12		13.0						
CL500-16	630	17.0	34.5	44	64	68	57	146
CL630-12		13.0						
CL630-16		17.0						