


CONV-B Series – Nickel Plated Brass Thread Convertors

- Thread convertors enable the connection of metric conduits and fittings to accessories with PG threads

Product Details:

- Material - Nickel Plated Brass
- Temperature Range - -40°C (Min) to 100 °C (Max)
- Protection Degree - IP68 (when O-ring installed)
- Certification - CE, RoHS
- Features
 - External male PG thread with an internal female metric thread.
 - Hex flange to secure fitting and prevent water ingress
 - Form B available by default. (Form A available in selected sizes)

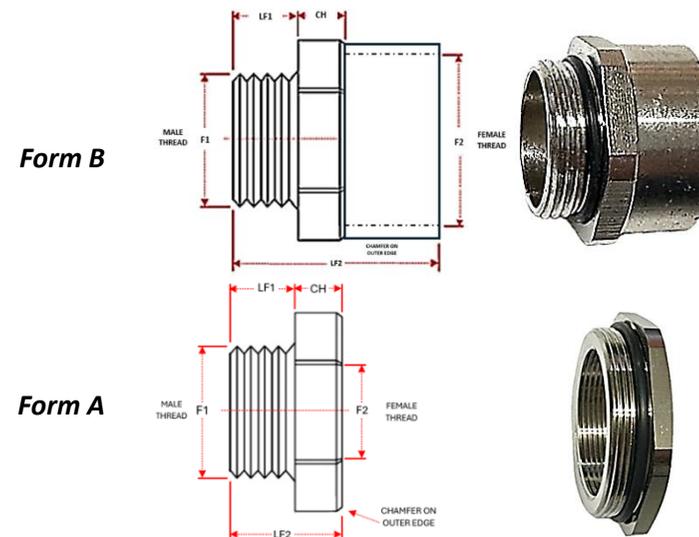

Product Catalogue No.	External Thread (F1)	Internal Thread (F2)	PG Thread Length (LF1) (mm)	Internal Thread Length (mm)	Flange Width (mm)	Total Length (LF2) (mm)	Form
CONV-PG09-M16-B	PG09	M16 x 1.5	7.0	12.0	4.0	20.0	B
CONV-PG09-M20-B	PG09	M20 x 1.5	7.0	12.0	4.0	20.0	B
CONV-PG11-M16-B	PG11	M16 x 1.5	6.0	6.0	4.0	9.0	A
CONV-PG11-M20-B	PG11	M20 x 1.5	7.0	12.0	4.0	20.0	B
CONV-PG13-M20-B	PG13	M20 x 1.5	7.0	12.0	4.0	20.0	B
CONV-PG16-M20-B	PG16	M20 x 1.5	7.0	12.0	4.0	20.0	A, B
CONV-PG16-M25-B	PG16	M25 x 1.5	7.0	14.0	4.0	28.0	B
CONV-PG21-M20-B	PG21	M20 x 1.5	7.0	11.0	4.0	11.0	A
CONV-PG21-M25-B	PG21	M25 x 1.5	7.0	14.0	4.0	22.0	B
CONV-PG21-M32-B	PG21	M32 x 1.5	7.0	14.0	4.0	23.0	B
CONV-PG29-M25-B	PG29	M25 x 1.5	8.0	12.0	5.0	12.0	A
CONV-PG29-M32-B	PG29	M32 x 1.5	7.0	11.0	5.0	11.0	A, B
CONV-PG29-M40-B	PG29	M40 x 1.6	8.0	17.0	5.0	27.0	B
CONV-PG48-M40-B	PG48	M40 x 1.6	9.0	17.0	5.0	28.0	B
CONV-PG21-M25-BB	PG21	M25 x 1.5	10.0	8.0	-	27.0	B