




Copper Cable Lugs – Heavy Duty, Long Barrel, Bell-Mouthed

- Bell-mouthed cable entry ensures smooth cable alignment and fast installation.
- Compression type cable lugs

Product Details:

Material	-	E-Copper
Finish	-	Electro-tinned copper
Characteristics	-	Bell mouthed entry with inspection hole
Voltage Rating	-	Up to 11kV
Applications	-	Suitable for stranded and fine-stranded cables

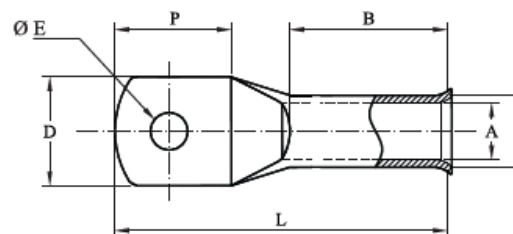

L&C Product Code	Cable Size (mm ²)	Hole Size (Ø E)	Dimensions (mm)						
			A	C	D	P	B	L	
CL10-5BM	10	5.2	4.5	6.9	12	14	11	28	
CL10-6BM		16				30			
CL10-8BM						21		35	
CL10-10BM		17			24	38			
CL10-12BM									
CL16-6BM	16	6.2	5.9	8	12	15	20	39	
CL16-8BM		18						26	50
CL16-10BM									
CL16-12BM									
CL25-6BM	25	6.2	7	9.7	14	16	23	42	
CL25-8BM		18						23	50
CL25-10BM									
CL25-12BM									
CL35-6BM	35	6.2	8.4	11.5	16	19	23	46	
CL35-8BM		19						27	53
CL35-10BM					24	35			
CL35-12BM									
CL50-8BM	50	8.2	9.5	12.7	18	20	24	49	
CL50-10BM		22						26	55
CL50-12BM									
CL70-8BM	70	8.2	11.1	14.3	20	23	24	54	
CL70-10BM		10.5						13.0	64
CL70-12BM									
CL70-16BM		17.0							

L&C Product Code	Cable Size (mm ²)	Hole Size (Ø E)	Dimensions (mm)					
			A	C	D	P	B	L
CL95-8BM	95	8.2	13.6	17.4	25	29	25	60
CL95-10BM		10.5						
CL95-12BM		13.0				33		
CL95-16BM		17.0						
CL120-8BM	120	8.2	15.5	20.6	29	27	32	70
CL120-10BM		10.5						
CL120-12BM		13.0				32		
CL120-16BM		17.0						
CL150-8BM	150	8.2	16.3	22.3	31	34	32	76
CL150-10BM		10.5						
CL150-12BM		13.0						
CL150-16BM		17.0						
CL185-10BM	185	10.5	18.3	24.3	34	35	32	81
CL185-12BM		13.0						
CL240-10BM	240	10.5	21.2	28.6	40	41	40	99
CL240-12BM		13.0						
CL240-16BM		17.0						
CL300-10BM	300	10.5	23.8	31.9	45	45	47	107
CL300-12BM		13.0						
CL300-16BM		17.0						
CL400-10BM	400	10.5	27.5	35.5	49	51	48	113
CL400-12BM		13.0						
CL500-10BM	500	10.5	30	38	55	60	50	130
CL500-12BM		13.0						
CL630-12BM	500	13.0	34.5	44	64	68	57	146
CL630-16BM		17.0						

Last Updated 9/10/2025

Last Updated 09/10/2025