


LNRS Series – Galvanised Steel Lock Rings

Product Details:

- Material - Steel
- Finish - Heavy Duty Galvanised Steel
- Characteristics
 - A heavy duty, anti-slip lock nut with locking barbs to prevent slippage when tightened
 - Female internal metric thread
- Applications
 - Suitable for use with all liquid tight conduit fittings with a metric conduit thread
 - Ideal for securing male threaded liquid tight fittings to cable ways, bulkheads or electrical enclosures

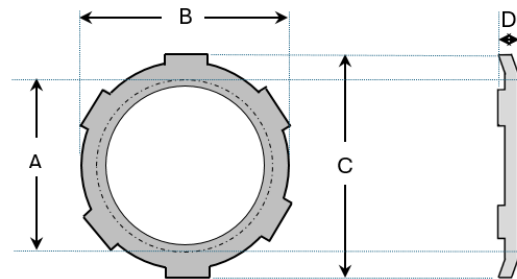

Plan View

End Elevation



Product Catalogue No.	Nominal Conduit Size (mm)	Internal Thread size (A) (mm)	Height (B) (mm)	Width (C) (mm)	Thickness (D) (mm)
LNRS-16	16	M16 x 1.5	21.25	24.5	3.75
LNRS-20	20	M20 x 1.5	25.0	27.0	4.0
LNRS-25	25	M25 x 1.5	32.5	33.0	4.0
LNRS-32	32	M32 x 1.5	41.0	44.0	4.5
LNRS-40	40	M40 x 1.5	49.0	53.0	5.0
LNRS-50	50	M50 x 1.5	59.5	65.5	5.5
LNRS-63	63	M63 x 1.5	70.0	74.0	5.5

Note: Tolerance = + / - 5% for all dimensions