


LC-CG Series – Cable Clamping Gland (Nickel Plated Brass)

- Nickel Plated Brass Clamping Cable Glands
- Provides maximum protection for electrical installations in Industrial and Commercial environments.

Product Details:

Temperature range	- -40°C Min to + 100°C Max (Short term 120°C)
Material	- Nickel Plated Brass
Thread Seal	- Modified Rubber
Core Retainer	- PA6 Cable Clamp
Ferrule	- SUS 304
Bushing	- Thermoplastic Elastomer (TPE)
IP Protection	- IP65 <i>Note 1</i>
Characteristics	- Multi-part compression fitting - Simple structure, small footprint, - Quick and easy installation

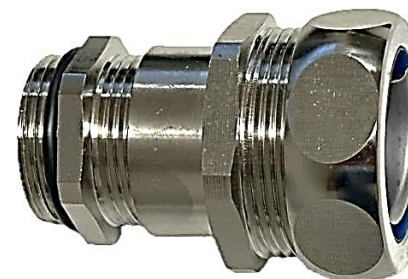

Product Catalogue No.	Metric Thread Dimensions	Clamping Range (mm)	Thread Length (mm)
LC-20-B-CG	M20 X 1.5	6 - 12	7
LC-25-B-CG	M25 X 1.5	8 - 14	7
LC-32-B-CG	M32 X 1.5	15 - 22	8
LC-40-B-CG	M40 X 1.5	22 - 30	9
LC-50-B-CG	M50 X 1.5	30 - 35	9
LC-63-B-CG	M63 X 1.5	37 - 44	10

Notes:

1. To achieve the stated IP protection rating, the supplied modified rubber thread sealing washer must be installed
2. Locknut not supplied with this fitting