



# HSHW – Heavy Wall Glue Lined Heatshrink Tubing


- Dual wall, hot melt adhesive inner lined heatshrink tubing
- U.V resistant, non-flame retardant
- Available in 1.22 metre (4 foot) lengths

## Product Details:

- |                              |  |
|------------------------------|--|
| Softening Point              | - 85°C +/- 5°C   |
| Minimum Recovery Temperature | - 120°C  |
| Dielectric Strength          | - 12kV / mm (2mm) min  |
| Characteristics              | - UV Resistant, non-flame retardant  |
| Standard Colours             | - Black  |
| Features                     | - Dual wall, hot melt adhesive inner lined   |
| Availability                 | - 1.22 mtr (4 foot) lengths  |
| Compliance                   | - RoHS compliant   |
| Applications                 | - Provides a waterproof seal which protects electrical splices, cable terminations and electrical joints                         |
|                              | - The 3 : 1 shrink ratio enables the unrecovered heatshrink to easily fit over irregular and large connections prior to recovery |



L&C Product Code	Internal Diameter (mm) As Supplied D (Min)	Shrink Ratio	After Recovery (mm)	
			Internal Diameter d (Max)	Nominal Wall Thickness w (Min)
HSHW15-4/4FT	15	3 : 1	4	2.4
HSHW22-6/4FT	22	3 : 1	6	2.7
HSHW33-8/4FT	33	3 : 1	8	3.2
HSHW45-12/4FT	45	3 : 1	12	4.0
HSHW55-16/4FT	55	3 : 1	16	4.0
HSHW65-19/4FT	65	3 : 1	19	4.0
HSHW75-22/4FT	75	3 : 1	22	4.0
HSHW95-29/4FT	95	3 : 1	29	4.2

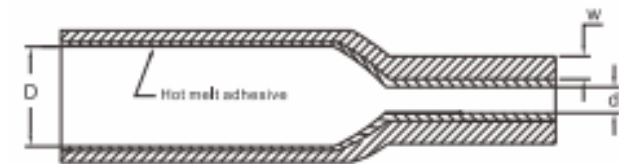

(For availability and pricing contact [sales@Lnc.net.au](mailto:sales@Lnc.net.au).)