



HSTW – THIN WALL HEATSHRINK TUBING


- A general purpose thin wall, flexible heatshrink tubing
- Non-flame retardant
- Available in 1.22 metre (4 foot) straight lengths or rolls
- Colours available include black, clear, red, white, blue, yellow/green, orange, yellow

Product Details:

- | | | |
|------------------------------|---|--|
| Operating Temperature Range | - | -55°C to + 105°C |
| Minimum Recovery Temperature | - | 105°C |
| Voltage Rating | - | 600 volts |
| Characteristics | - | Non flame retardant |
| Compliance | - | RoHS compliant |
| Colour | - | Black and clear (standard colours) - Other colours available |
| Characteristics | - | Non-flame retardent tubing |
| Availability | - | 1.22 mtr (4 foot) lengths and rolls |
| Compliance | - | RoHS compliant |
| Applications | - | The smooth outer skin provides a durable and flexible finish after recovery |
| | - | Most suitable for use in domestic, commercial and industrial electrical environments |



L&C Product Code	Internal Diameter (mm) "D" (Min)	Shrink Ratio	After Recovery (mm)	
			Internal Diameter "d" (Max)	Nominal Wall Thickness "w" (Min)
HSTW1.5BK	1.6	2 : 1	0.8	0.36
HSTW2.5BK	2.4	2 : 1	1.2	0.42
HSTW3BK	3.2	2 : 1	1.6	0.42
HSTW5BK	4.8	2 : 1	2.4	0.52
HSTW7BK	6.4	2 : 1	3.2	0.54
HSTW10BK	9.5	2 : 1	4.8	0.54
HSTW13BK	12.7	2 : 1	6.4	0.62
HSTW16BK	15.9	2 : 1	7.9	0.67
HSTW20BK	19.1	2 : 1	9.5	0.75
HSTW25BK	25.4	2 : 1	12.7	0.85
HSTW32BK	31.8	2 : 1	15.9	0.85
HSTW38BK	38.1	2 : 1	19.1	0.96
HSTW50BK	50.8	2 : 1	25.4	0.97

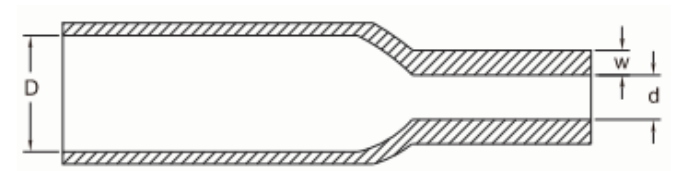

(Refer L&C website for full product listing detailing available colours and sizes – <https://www.lnc.net.au/heatshrink-> For availability and pricing contact sales@lnc.net.au.)