


L&C HALF SADDLES HOT DIP GALVANISED

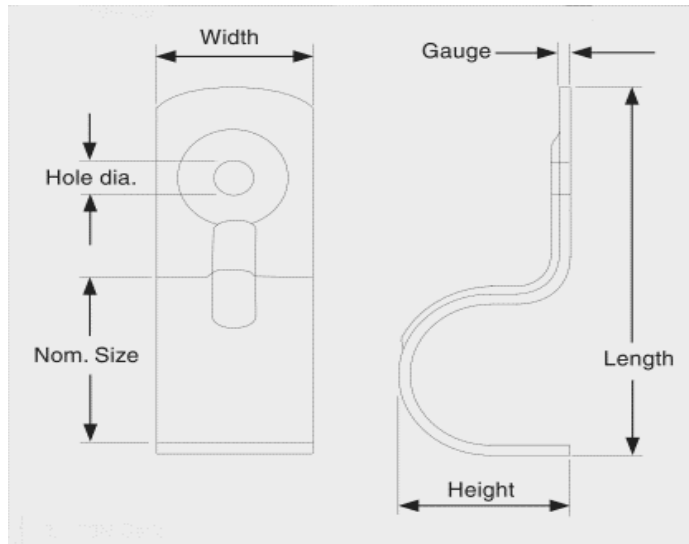

ODE	Size (mm)	Thickness (mm)	Hole Dia. (mm)	Length (mm)	Width (mm)	Height (mm)	Box/Ctn. Qty. (pcs)
LC-HS16HDG	16mm	1.2	6.5	46	19	18	150/1200
LC-HS20HDG	20mm	1.2	6.5	50	19	22	100/800
LC-HS25HDG	25mm	1.2	6.5	60	25	26	100/400
LC-HS32HDG	32mm	1.2	6.5	67	24	33	50/400
LC-HS40HDG	40mm	1.2	6.5	74	32	41	50/400
LC-HS50HDG	50mm	1.5	6.5	85	39	54	25/200

Features:

- As per AS/NZS 4680:2006
- Hot Dip Galvanised quality/finish
- Used for securing Electrical PVC Rigid/ Flexible or Corrugated Conduit in place
- Optimal corrosion protection