




## METRIC - 316 GRADE STAINLESS STEEL STRAIGHT TERMINATORS

RANGE OF A FOUR COMPONENT GRADE 316 STAINLESS STEEL STRAIGHT TERMINATORS FOR MAXIMUM PROTECTION OF ELECTRICAL DEVICES IN COMMERCIAL-INDUSTRIAL SITES AND THE FOOD INDUSTRY, WITHSTANDING EXPOSURE TO HEAT, WATER AND HARSH CLEANING CHEMICALS

### Product Details

- Temperature range - 45C to + 135C
- Material - Grade 316 Stainless Steel.
- Protection degree - IP66/IP67/IP68
- Characteristics - Food Grade, High tensile strength, oil resistant, rust and corrosion resistant.
- Installation - Four component fitting supplied with nylon insulating throat & zinc plated steel ferrule supplied
- UV Rating - U.V. resistant and suitable for outdoor use
- Compatibility - Interchangeable with all Liquid-tight conduits made to American (UL360) sizes.
- Applications - Suitable for threaded and knock out entries, food applications, marine applications.

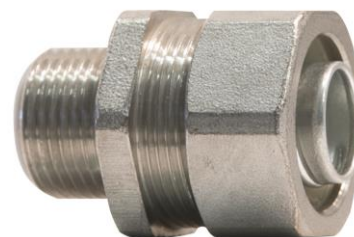

Product Catalogue No.	Thread Dimensions	Fits to Conduit Size	Thread Length	Inside diameter (mm)	Outside diameter (mm)	Total Length
LC-16-SS	M16 X 1.5	AD17.8	12.7	10.4	28	36.7
LC-16/20-SS	M20 X 1.5	AD17.8	12.7	13.5	28	36.7
LC-20-SS	M20 X 1.5	AD21.1	12.7	13.5	32	36.7
LC-25-SS	M25 X 1.5	AD26.4	14.2	18.5	39	39.3
LC-32-SS	M32 X 1.5	AD33.1	16.3	24.9	47	43.3
LC-40-SS	M40 X 1.5	AD41.8	18.2	33.4	60	51.2
LC-50-SS	M50 X 1.5	AD47.9	18.2	37.8	67	51.2
LC-63-SS	M63 X 1.5	AD59.7	20.0	48.6	81	54