


Full Saddles (Hot Dipped Galvanised)

- For the securing of electrical conduits (rigid and flexible) to solid surfaces in industrial and commercial environments

Product Details:

- Material - Hot dipped galvanised steel finish
- Standards - Manufactured to comply with AS/NZS 4680:2006
- Fixings - Accommodates 6.5mm nail in anchors
- Applications - For the securing of electrical conduits to solid surfaces

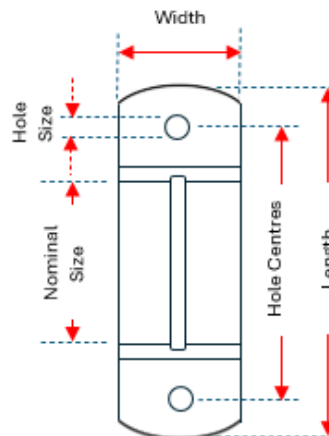

Product Catalogue No.	Nominal Size (mm)	Thickness (mm)	Hole Size (mm)	Hole Centre	Length (mm)	Width (mm)	Height (mm)
LC-FS16HDG	16mm	1	6.5	32.0	45.0	13.0	24.0
LC-FS20HDG	20mm	1	6.5	39.0	50.0	16.0	23.0
LC-FS25HDG	25mm	1	6.5	48.0	62.0	19.0	28.0
LC-FS32HDG	32mm	1	6.5	63.0	79.0	25.0	35.0
LC-FS40HDG	40mm	1	6.5	71.0	87.0	25.0	44.0
LC-FS50HDG	50mm	1	6.5	92.0	108.0	25.0	53.0
LC-FS63HDG	63mm	2	7.2	107.0	130.0	39.0	66.0
LC-FS80HDG	80mm	2	9.2	136.0	166.0	40.0	92.0
LC-FS100HDG	100mm	2	9.2	160.0	190.0	40.0	118.0